



ALUMINIUM PLANKS

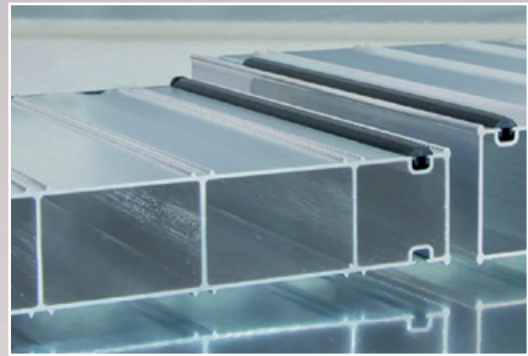

FEATURES

- Plank profile has a four (4) chamber design for superior strength.
- Full length knurling satisfies the grip requirements of Australian Scaffold Standards – Plank Standard AS/NZS 1577:2013 .
- Rubber strips inserted both sides for additional safety.
- Plank lock sits flush with the connecting planks to provide a safe, sturdy work area.
- Glass reinforced, moulded end caps.
- Designed & manufactured in Australia.

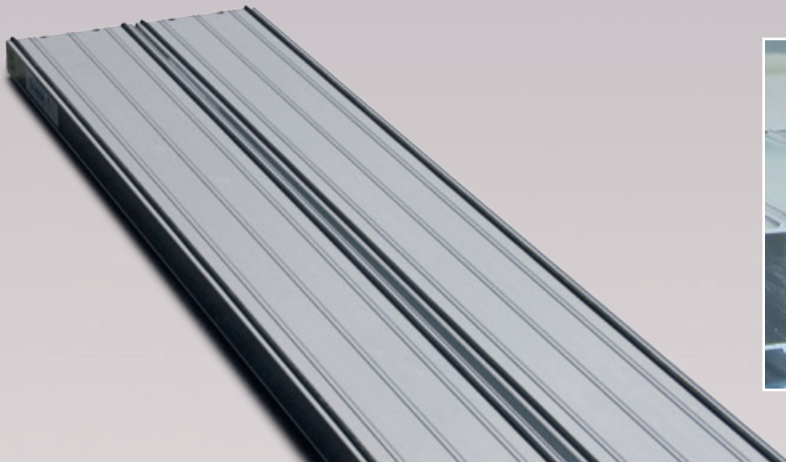

SPECIFICATIONS

- Standard lengths: 2.4 m, 3.0 m, 4.0 m, 5.0 m, 6.0 m. Other lengths available upon request.
- Plank profile dimensions: 50 mm (h) with a 1.8 mm wall thickness.
- Single plank is rated to a working load limit (WLL) of 205 kg (max. span 3.0 m); two planks are rated to 225 kg WLL (max. span 5.4 m) when used in conjunction with plank locks.
- Plank weight: 3.6 kg/m.