




ALUMINIUM PLANKS

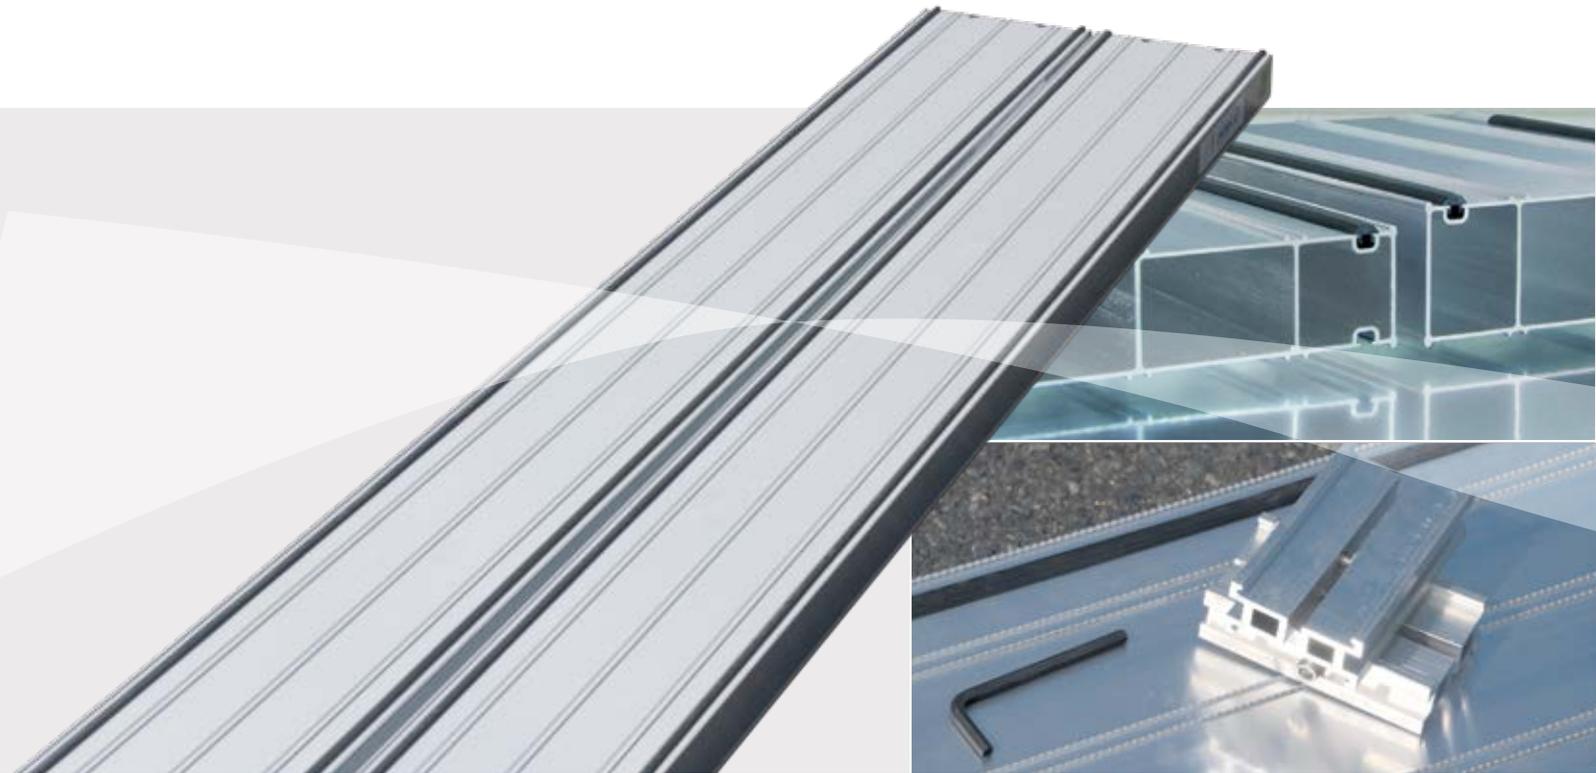

WHY CHOOSE QUICKALLY

- ✓ Plank profile has a four (4) chamber design for superior strength.
- ✓ Full length knurling satisfies the grip requirements of Australian Scaffold Standards – Plank Standard AS/NZS 1577:2013 .
- ✓ Rubber strips inserted both sides for additional safety.
- ✓ Plank lock sits flush with the connecting planks to provide a safe, sturdy work area.
- ✓ Glass reinforced, moulded end caps.
- ✓ Designed & manufactured in Australia.
- ✓ Standard lengths: 1.0m, 1.5m, 2.0m, 2.4 m, 3.0 m, 4.0 m, 5.0 m, 6.0 m. Other lengths available upon request.
- ✓ Plank profile dimensions: 50 mm (h) with a 1.8 mm wall thickness.
- ✓ Single plank is rated to a working load limit (WLL) of 205 kg (max. span 3.0 m); two planks are rated to 225 kg WLL (max. span 5.4 m) when used in conjunction with plank locks.
- ✓ Plank weight: 3.6 kg/m.

 **132 559**
admin@quickally.com.au



10 YEAR
MANUFACTURER'S
WARRANTY