




## SWING STAGE CRADLES

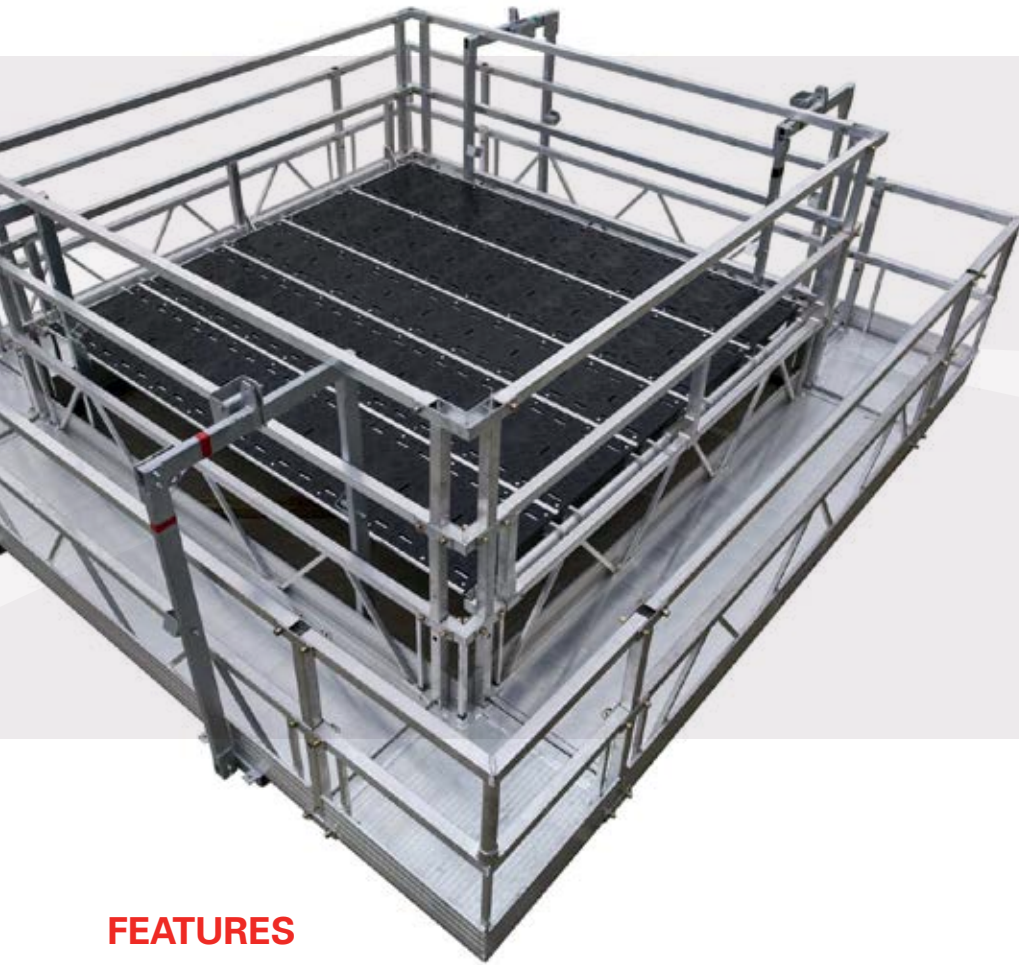

### FEATURES

- ✓ QuickAlly Modular Swing Stage cradles consist of Aluminium Side Frames, Handrails, Decks, U Joiners, Steel End Hangers and Duct Through Hangers and 20mm quick pin with optional wall rollers and castors.
- ✓ Aluminium Components are made from specially extruded structural grade aluminium profiles.
- ✓ Standard Modular Swing Stage Sections are available in 0.5m, 1.0m, 1.5m, 2.0m, 2.5 & 3.0m lengths which allow for a high degree of flexibility in platform length configuration up to a Maximum of 16mtrs.
- ✓ Configurations of up to 16m in length with maximum supports at 12m with a maximum of 2m cantilever end of the Swing Stage
- ✓ Custom Fabrication allows for angles of 10 degrees through to 90 degrees to be obtained for the Swinging Stage Cradle.
- ✓ Safe Work Load (SWL) is rated at 450kg.

 **132 559**  
admin@quickally.com.au



**10** YEAR  
MANUFACTURER'S  
WARRANTY